



# JUPITER

## GSP7F72M-550W


10BB Half-cut Mono Perc

### SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



### PERFORMANCE WARRANTY

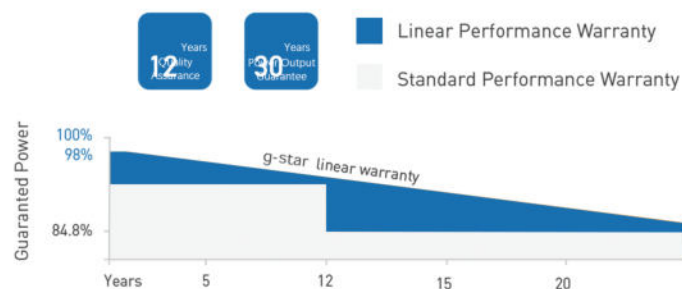

### KEY FEATURES



#### 10BB Half-cut Cell Technology

New circuit design, lower internal current, lower  $R_s$  loss  
Ga doped wafer, attenuation  $< 2\%$  (1st year) /  $\leq 0.55\%$  (Linear)



#### Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



#### Lower LCOE

2% more power generation, lower



#### Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



#### IP68 Junction Box

High waterproof level

# Electrical Characteristics

Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power(Pmax/W)	530	395	535	398	540	402	545	406	550	410
Operating Voltage (Vmpp/V)	41.32	38.6	41.48	38.7	41.64	38.8	41.80	39.0	41.96	39.1
Operating Current (Impp/A)	12.83	10.24	12.90	10.30	12.97	10.36	13.04	10.41	13.11	10.47
Open-Circuit Voltage(Voc/V)	49.32	46.4	49.46	46.5	49.60	46.7	49.76	46.8	49.92	47.0
Short-Circuit Current(Isc/A)	13.72	11.06	13.79	11.12	13.86	11.17	13.93	11.23	14.00	11.28
Module Efficiency(%)	20.50		20.70		20.90		21.10		21.30	


# Mechanical Characteristucs

Solar Cell	Monocrystalline Silicon (10Busbar)
No. of Cells	144pcs in series (6*24)
Module Dimension	2278*1134*35mm(89.69*44.65*1.38inches)
Weight	28kg(61.73lbs.)
Front Glass	3.2mm Coated Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68,3 Bypass Diodes
Output Cables	4mm <sup>2</sup> (IEC).12AWG(UL)300mm in Length or Customized Length
Connectors	MC4/MC4-EVO2

# Mechanical Characteristucs

Pieces Per Pallet	31	31(USA)
Pieces Per Container(40' HQ)	620	620


# I-V Curve

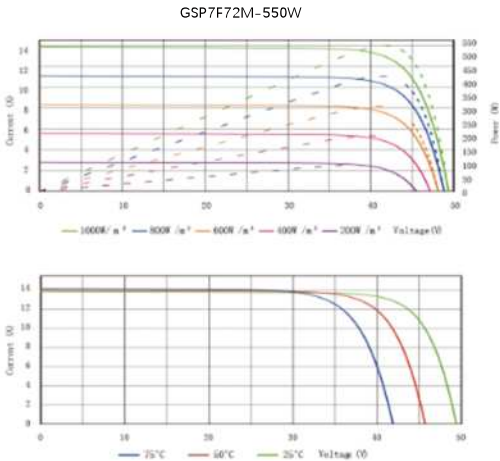

# Application Conditions

Maximun System Voltage	1000V/1500V/DC(IEC)
Operating Temperature	-40° C+85° C
Maximun Series Fuse	25A
Safety Protection Class	Class II
Mechanical Load (Front side]	5400Pa
Mechanical Load (Back side!)	2400Pa

# Technical Drawings

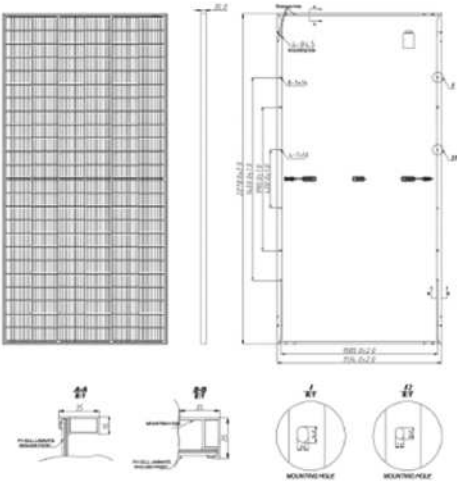

# Temperature Characteristics

Temperature Coefficient of Pmax	-0.35%/° C
Temperature Coefficient of Isc	-0.26%/° C
Temperature Coefficient of Voc	+0.048%/° C
Nominal Module OperatingTemperature(NMOT)	43±2° C



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, AG. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.